



SWIFT

CREATING SMILES FOR LIFE

Love Life
LOVE SWIFT

2022
Motorhomes

TECHNICAL
SPECIFICATION

SELECT SPECIFICATION






122




144



164

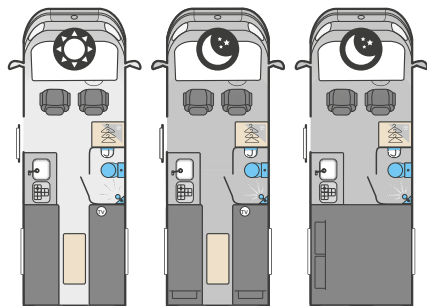

	Standard		Optional		Standard		Optional		Standard		Optional	
Fiat MultiJet diesel engine	140		140 Auto		140		140 Auto		140		140 Auto	
Engine capacity	2.2ltr				2.2ltr				2.2ltr			
Engine power	140 Hp @ 3500 rpm		140 HP @ 3500rpm		140 Hp @ 3500 rpm		140 HP @ 3500rpm		140 Hp @ 3500 rpm		140 HP @ 3500rpm	
Engine torque	350 Nm @ 1400 rpm		380 Nm @ 1400rpm		350 Nm @ 1400 rpm		380 Nm @ 1400rpm		350 Nm @ 1400 rpm		380 Nm @ 1400rpm	
Chassis	Panel Van				Panel Van				Panel Van			
Wheelbase	4.04m / 13'3"				4.04m / 13'3"				4.04m / 13'3"			
Seat belts (inc. driver)	2				4				4			
Berths (sleeping positions)	2				3				3			
Overall length	6.00m / 19'8"				6.00m / 19'8"				6.36m / 20'11"			
Overall body width (mirrors folded)	2.26m / 7'5"				2.26m / 7'5"				2.26m / 7'5"			
Overall height	2.72m / 8'11"				2.72m / 8'11"				2.72m / 8'11"			
Standard awning	Thule 6300 3.5m				Thule 6300 3.5m				Thule 6300 3.5m			
Maximum technical permissible laden mass (A)	3500kg				3500kg				3500kg			
Mass in running order (B)	2912kg		2945kg		2970kg		3003kg		2998kg		3031kg	
Maximum user payload (A-B)	588kg		555kg		530kg		497kg		502kg		469kg	
Thermal insulation grade	THREE				THREE				THREE			
BED SIZES												
Front double												
Rear offside single					170cm x 90cm / 54cm / 5'7" x 2'11" / 1'9"				170cm x 90cm / 54cm / 5'7" x 2'11" / 1'9"			
Rear double	186cm x 188cm / 6'1" x 6'2"				183cm x 135cm / 6'0" x 4'5"				185cm x 130cm / 6'1" x 4'3"			
Rear single offside	188cm x 65cm / 6'2" x 2'2"											
Rear single nearside	188cm x 65cm / 6'2" x 2'2"											






Standard	Optional
140	140 Auto
2.2ltr	
140 Hp @ 3500 rpm	140 HP @ 3500rpm
350 Nm @ 1400 rpm	380 Nm @ 1400rpm
Panel Van	
4.04m / 13'3"	
4	
4	
6.36m/20'11"	
2.26m / 7'5"	
2.72m / 8'11"	
Thule 6300 3.5m	
3500kg	
3033kg	3066kg
467kg	434kg
THREE	
176cm x 122cm / 5'9" x 4'0"	
170cm x 90cm / 5'4cm / 5'7" x 2'11" / 1'9"	
186cm x 120cm / 6'1" x 3'11"	

SELECT COMPACT SPECIFICATION



C205	Icon: 4 people	Icon: 2 people	C404	Icon: 4 people	Icon: 2 people	C500 New	Icon: 4 people	Icon: 2 people
------	----------------	----------------	------	----------------	----------------	-----------------	----------------	----------------

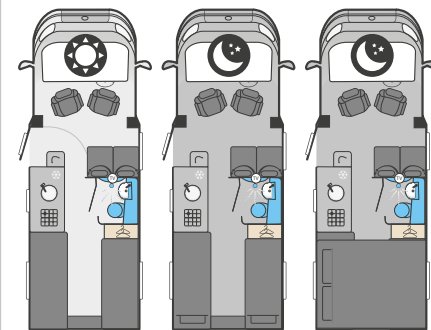


	Standard	Optional	Optional	Standard	Optional	Optional	Standard	Optional	Optional
Fiat MultiJet diesel engine	120	140	140 Auto	120	140	140 Auto	120	140	140 Auto
Engine capacity		2.2ltr			2.2ltr			2.2ltr	
Engine power	120 Hp @ 3500 rpm	140 Hp @ 3500 rpm	140 HP @ 3500rpm	120 Hp @ 3500 rpm	140 Hp @ 3500 rpm	140 HP @ 3500rpm	120 Hp @ 3500 rpm	140 Hp @ 3500 rpm	140 HP @ 3500rpm
Engine torque	320 Nm @ 1400 rpm	350 Nm @ 1400 rpm	380 Nm @ 1400rpm	320 Nm @ 1400 rpm	350 Nm @ 1400 rpm	380 Nm @ 1400rpm	320 Nm @ 1400 rpm	350 Nm @ 1400 rpm	380 Nm @ 1400rpm
Wheel base		3.80m / 12'6"			3.80m / 12'6"			3.80m / 12'6"	
Seat belts (inc. driver)		4			4			4	
Berths (sleeping positions)		2			4			2	
Overall length		5.99m / 19'8"			5.99m / 19'8"			6.65m / 21'10"	
Overall body width (mirrors folded)		2.26m / 7'5"			2.26m / 7'5"			2.26m / 7'5"	
Overall height		2.78m / 9'1"			2.78m / 9'1"			2.78m / 9'1"	
Optional awning		Thule 4200 3.0m			Thule 4200 3.0m			Thule 4200 3.0m	
Maximum technical permissible laden mass (A)		3300kg			3300kg			3300kg	
Mass in running order (B)	2705kg	2705kg	2738kg	2775kg	2775kg	2808kg	2797kg Est	2797kg Est	2830kg Est
Maximum user payload (A-B)	595kg	595kg	562kg	525kg	525kg	492kg	503kg Est	503kg Est	470kg Est
Thermal insulation grade		THREE			THREE			THREE	
Maximum trailer weight		2000kg			2000kg			2000kg	
Gross train weight		5300kg			5300kg			5300kg	

BED SIZES											
Rear double		194cm x 131cm / 6'4" x 4'4"				193cm x 120cm / 6'4" x 3'11"				192cm x 183cm / 6'4" x 6'0"	
Rear nearside single										196cm x 68cm / 6'5" x 2'3"	
Rear offside single										183cm x 68cm / 6'0" x 2'3"	
Drop down bed						183cm x 118cm / 6'1" x 3'10"					



SELECT COMPACT OPTIONAL EXTRAS



Standard	Optional	Optional
120	140	140 Auto
	2.2ltr	
120 Hp @ 3500 rpm	140 Hp @ 3500 rpm	140 HP @ 3500rpm
320 Nm @ 1400 rpm	350 Nm @ 1400 rpm	380 Nm @ 1400rpm
	3.80m / 12'6"	
	4	
	2	
	6.65m / 21'10"	
	2.26m / 7'5"	
	2.78m / 9'1"	
	Thule 4200 3.0m	
	3300kg	
2797kg	2797kg	2830kg
503kg	503kg	470kg
	THREE	
	2000kg	
	5300kg	
	196cm x 74cm / 6'5" x 2'5"	
	184cm x 74cm / 6'0" x 2'5"	

FACTORY FIT

The following weights are for optional extras fitted at the time of manufacture of the motorhome (subject to availability).

	WEIGHT
Detachable homologated tow bar* and electrics	40kg
Thule roll-out awning	33kg
'Swiftshield' stain-resistant upholstery fabric	-

DEALER FIT

	WEIGHT
Thule Elite G2 two cycle rack**	10.1kg

Notes:

* Please note that the additional weight of the tow bar and trailer nose weight increases the rear axle loading of the motorhome so care should be taken that the rear axle load is not exceeded when towing. To ensure adequate road holding, the load on the front axle, under all conditions, must not be less than 40% or more than 70% of the total weight. Care must be taken when distributing loads. Please see the Technical Handbook for permissible axle loads, the loadings and weights stated are maximums and must not be exceeded under any circumstances

** Dependent on model, visibility through rear camera may be reduced when bicycles are carried on the optional bike carrier

Est Estimate

EDGE SPECIFICATION





	464			466			476			
	Standard	Optional	Optional	Standard	Optional	Optional	Standard	Optional	Optional	
Fiat Multijet diesel engine	120	140	140 Auto	120	140	140 Auto	120	140	140 Auto	
Engine capacity	2.2ltr			2.2ltr			2.2ltr			
Engine power	120 Hp @ 3500 rpm	140 Hp @ 3500 rpm	140 HP @ 3500 rpm	120 Hp @ 3500 rpm	140 Hp @ 3500 rpm	140 HP @ 3500 rpm	120 Hp @ 3500 rpm	140 Hp @ 3500 rpm	140 HP @ 3500 rpm	
Engine torque	320 Nm @ 1400 rpm	350 Nm @ 1400 rpm	380 Nm @ 1400 rpm	320 Nm @ 1400 rpm	350 Nm @ 1400 rpm	380 Nm @ 1400 rpm	320 Nm @ 1400 rpm	350 Nm @ 1400 rpm	380 Nm @ 1400 rpm	
Roof profile	Low-Line			High-Line			High-Line			
Wheel base	3.80m / 12'6"			4.04m / 13'3"			4.04m / 13'3"			
Seat belts (inc. driver)	4			6			6			
Berths (sleeping positions)	4			6			6			
Overall length	6.75m / 22'2"			7.32m / 24'0"			7.32m / 24'0"			
Overall body width (mirrors folded)	2.39m / 7'10"			2.39m / 7'10"			2.39m / 7'10"			
Overall height	2.91m / 9'6"			2.98m / 9'9"			2.98m / 9'9"			
Optional awning	Thule 4200 3.5m			Thule 4200 3.5m			Thule 4200 3.5m			
Maximum technical permissible laden mass (A)	3500kg			3650kg			3500kg	3500kg	3650kg	
Mass in running order (B)	2850kg	2850kg	2883kg	3016kg Est	3016kg Est	3049kg Est	2991kg	2991kg	3024kg	
Maximum user payload (A-B)	650kg	650kg	617kg	634kg Est	634kg Est	601kg Est	509kg	509kg	626kg	
Thermal insulation grade	THREE			THREE			THREE			
Maximum trailer weight	2000kg			2000kg			N/A	N/A	2000kg	
Gross train weight	5500kg			5650kg			3500kg	3500kg	5650kg	
BED SIZES										
Front double	215cm x 123cm / 92cm / 7'1" x 4'0" / 3'0"			215cm x 180cm / 121cm / 7'1" x 5'11" / 4'0"			215cm x 180cm / 86cm / 7'1" x 5'11" / 2'10"			
Rear double	188cm x 133cm / 6'2" x 4'4"						214cm x 143cm / 7'0" x 4'8"			
Rear nearside single							191cm x 83cm / 6'3" x 2'5"			
Rear offside single							191cm x 83cm / 6'3" x 2'5"			
Rear bunk (upper)				204cm x 85cm / 6'8" x 2'9"						
Rear bunk (lower)				204cm x 85cm / 6'8" x 2'9"						
Overcab bed				190cm x 134cm / 6'3" x 4'5"			190cm x 134cm / 6'3" x 4'5"			

486



494



Standard	Optional	Optional	Standard	Optional	Optional
120	140	140 Auto	120	140	140 Auto
	2.2ltr			2.2ltr	
120 Hp @ 3500 rpm	140 Hp @ 3500 rpm	140 HP @ 3500 rpm	120 Hp @ 3500 rpm	140 Hp @ 3500 rpm	140 HP @ 3500 rpm
320 Nm @ 1400 rpm	350 Nm @ 1400 rpm	380 Nm @ 1400 rpm	320 Nm @ 1400 rpm	350 Nm @ 1400 rpm	380 Nm @ 1400 rpm
	High-Line			High-Line	
	4.04m / 13'3"			4.04m / 13'3"	
	6			4	
	6			4	
	7.32m / 24'0"			7.32m / 24'0"	
	2.39m / 7'10"			2.39m / 7'10"	
	2.98m / 9'9"			2.98m / 9'9"	
	Thule 4200 3.5m			Thule 4200 3.5m	
3500kg	3500kg	3650kg		3500kg	
2991kg	2991kg	3024kg	2975kg	2975kg	3008kg
509kg	509kg	626kg	525kg	525kg	492kg
	THREE			THREE	
N/A	N/A	2000kg		2000kg	
3500kg	3500kg	5650kg		5500kg	
215cm x 180cm / 71" x 5'11" / 4'0"					
214cm x 131cm / 7'0" x 4'4"			185cm x 133cm / 6'1" x 4'4"		
190cm x 134cm / 6'3" x 4'5"			190cm x 134cm / 6'3" x 4'5"		

EDGE OPTIONAL EXTRAS

FACTORY FIT

The following weights are for optional extras fitted at the time of manufacture of the motorhome (subject to availability).

	WEIGHT
Detachable homologated tow bar* and electrics	70kg
Thule roll-out awning (464 & 494)	33kg
'Swiftshield' stain-resistant upholstery fabric	-
NEW Expedition Grey cab colour (464 & 494)	-
NEW Expedition Grey cab colour with front swivel seats (466, 474 & 486)	-

DEALER FIT	WEIGHT
Thule roll-out awning (466, 476 & 486)	33kg
Thule Elite G2 two cycle rack	10.1kg
3650kg MTPLM upgrade (excludes 466)	-

Notes:

* Please note that the additional weight of the tow bar and trailer nose weight increases the rear axle loading of the motorhome so care should be taken that the rear axle load is not exceeded when towing. To ensure adequate road holding, the load on the front axle, under all conditions, must not be less than 40% or more than 70% of the total weight. Care must be taken when distributing loads. Please see the Technical Handbook for permissible axle loads, the loadings and weights stated are maximums and must not be exceeded under any circumstances

Requires chassis upgrade to 3650kg on 476, 486

Est. Estimate






640



664



674

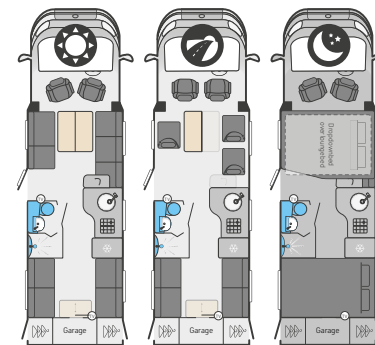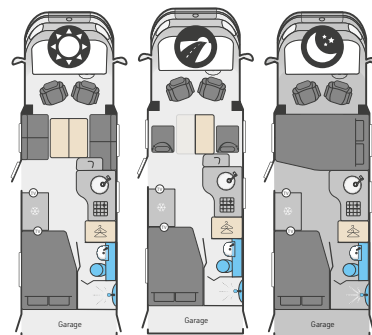
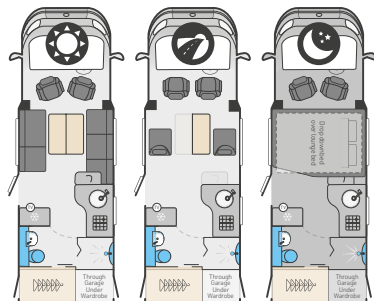


	Standard	Optional	Optional	Optional	Standard	Optional	Optional	Optional	Standard	Optional	Optional	Optional
Fiat MultiJet diesel engine	140	140 Auto	160	160 Auto	140	140 Auto	160	160 Auto	140	140 Auto	160	160 Auto
Engine capacity	2.2ltr				2.2ltr				2.2ltr			
Engine power	140 Hp @ 3500 rpm		160hp @ 3500rpm		140 Hp @ 3500 rpm		160hp @ 3500rpm		140 Hp @ 3500 rpm		160hp @ 3500rpm	
Engine torque	350 Nm @ 1400rpm	380 Nm @ 1400rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	350 Nm @ 1400rpm	380 Nm @ 1400rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	350 Nm @ 1400rpm	380 Nm @ 1400rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm
Wheel base	4.20m / 13'9"				4.30m / 14'1"				4.70m / 15'5"			
Seat belts (inc. driver)	4				4				5			
Berths (sleeping positions)	4				4				6			
Overall length	6.99m / 22'11"				7.84m / 25'9"				8.22m / 27'0"			
Overall body width (mirrors folded)	2.37m / 7'9"				2.37m / 7'9"				2.37m / 7'9"			
Overall height	2.86m / 9'5"				2.88m / 9'5" Est				2.86m / 9'5"			
Optional awning	Thule 4200 4.0m				Thule 4200 4.5m				Thule 4200 4.5m			
Maximum technical permissible laden mass (A)	3500kg				3500kg				4500kg			
Mass in running order (B)	3061kg	3094kg	3076kg	3094kg	3111kg Est	3144kg Est	3126kg Est	3144kg Est	3251kg Est	3284kg Est	3266kg Est	3284kg Est
Maximum user payload (A-B)	439kg	406kg	424kg	406kg	389kg Est	356kg Est	374kg Est	356kg Est	1249kg Est	1216kg Est	1234kg Est	1216kg Est
Thermal insulation grade	THREE				THREE				THREE			
Maximum trailer weight	2000kg				2000kg				2000kg			
Gross train weight	5500kg				5500kg				6000kg#			
BED SIZES												
Front double	194cm x 165cm / 136cm / 6'4" x 5'10" / 4'6"				194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"				194cm x 136cm / 6'4" x 4'6"			
Rear double					188cm x 129cm / 6'2" x 4'3"				202cm x 132cm / 6'8" x 4'4"			
Rear transverse single												
Rear nearside single												
Rear offside single												
Drop down bed	189cm x 150cm / 6'2" x 4'11"								189cm x 150cm / 6'2" x 4'11"			

684



694

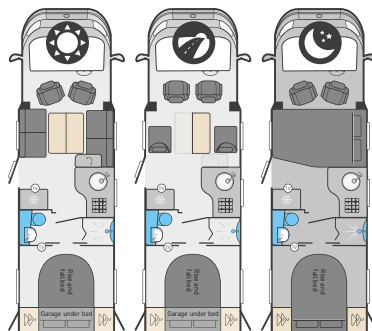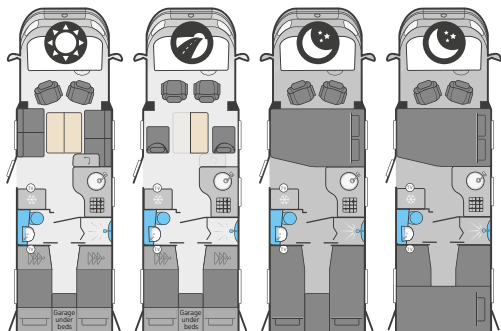

Standard	Optional	Optional	Optional	Standard	Optional	Optional	Optional
140	140 Auto	160	160 Auto	140	140 Auto	160	160 Auto
2.2ltr				2.2ltr			
140 Hp @ 3500 rpm		160hp @ 3500rpm		140 Hp @ 3500 rpm		160hp @ 3500rpm	
350 Nm @ 1400rpm	380 Nm @ 1400rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	350 Nm @ 1400rpm	380 Nm @ 1400rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm
4.70m / 15'5"				4.70m / 15'5"			
4				4			
4				4			
7.84m / 25'9"				7.84m / 25'9"			
2.37m / 7'9"				2.37m / 7'9"			
2.88m / 9'5" Est				2.88m / 9'5"			
Thule 4200 4.5m				Thule 4200 4.5m			
3500kg	3700kg	3500kg	3700kg	3700kg			
3131kg Est	3164kg Est	3146kg Est	3164kg Est	3178kg Est	3211kg Est	3193kg Est	3211kg Est
369kg Est	536kg Est	354kg Est	536kg Est	522kg	489kg	507kg	489kg
THREE				THREE			
2000kg				2000kg			
5500kg				5500kg			
194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"				194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"			
206cm x 115cm / 6'9" x 3'9"				180cm x 143cm / 5'11" x 4'8"			
195cm x 78cm / 6'5" x 2'7"							
195cm x 78cm / 6'5" x 2'7"							

ESCAPE OPTIONAL EXTRAS

FACTORY FIT

The following weights are for optional extras fitted at the time of manufacture of the motorhome (subject to availability).

WEIGHT

Detachable homologated tow bar* and electrics

40kg

DEALER FIT

WEIGHT

3700kg MTPLM upgrade (except 674, 684 and 694)

-

Thule Elite G2 two cycle rack (except 674)

10.1kg

Notes:

*

Please note that the additional weight of the tow bar and trailer nose weight increases the rear axle loading of the motorhome so care should be taken that the rear axle load is not exceeded when towing. To ensure adequate road holding, the load on the front axle, under all conditions, must not be less than 40% or more than 70% of the total weight. Care must be taken when distributing loads. Please see the Technical Handbook for permissible axle loads, the loadings and weights stated are maximums and must not be exceeded under any circumstances. Requires chassis upgrade to 3700kg on 664 and 684 with manual gearbox

**

Dependent on model, visibility through rear camera may be reduced when bicycles are carried on the optional bike carrier

#




The maximum trailer weight is limited by the gross train weight which must not be exceeded. For example if the vehicle is at the maximum MTPLM of 4500kg, then the maximum trailer weight possible is 1500kg. Reducing the weight of the vehicle by removing payload, will allow you to increase the trailer weight up to a maximum of 2000kg

Est.

Estimate


764

774

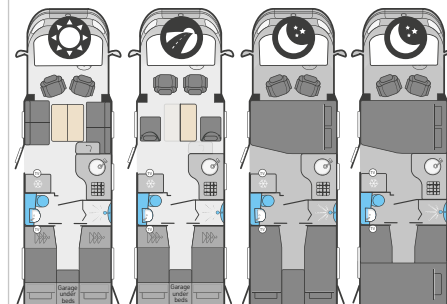784


	Standard	Optional	Optional	Optional	Standard	Optional	Optional	Optional	Standard	Optional	Optional	Optional
Fiat MultiJet diesel engine	160	160 Auto	180	180 Auto	160	160 Auto	180	180 Auto	160	160 Auto	180	180 Auto
Engine capacity	2.2ltr				2.2ltr				2.2ltr			
Engine power	160 HP @ 3500rpm		180 HP @ 3500rpm		160 HP @ 3500rpm		180 HP @ 3500rpm		160 HP @ 3500rpm		180 HP @ 3500rpm	
Engine torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm
Wheel base	4.30m / 14'1"				4.70m / 15'5"				4.70m / 15'5"			
Seat belts (inc. driver)	4				5				4			
Berths (sleeping positions)	4				6				4			
Overall length	7.84m / 25'9"				8.22m / 27'0"				7.84m / 25'9"			
Overall body width (mirrors folded)	2.38m / 7'10"				2.38m / 7'10"				2.38m / 7'10"			
Overall height	2.89m / 9'6"				2.87m / 9'5"				2.89m / 9'6"			
Standard awning	Thule 4200 4.5m				Thule 4200 4.5m				Thule 4200 4.5m			
Maximum technical permissible laden mass (A)	4500kg				4500kg				4500kg			
Mass in running order (B)	3397kg Est	3415kg Est	3397kg Est	3415kg Est	3617kg Est	3635kg Est	3617kg Est	3635kg Est	3440kg Est	3458kg Est	3440kg Est	3458kg Est
Maximum user payload (A-B)	1103kg Est	1085kg Est	1103kg Est	1085kg Est	883kg Est	865kg Est	883kg Est	865kg Est	1060kg Est	1042kg Est	1060kg Est	1042kg Est
Thermal insulation grade	THREE				THREE				THREE			
Maximum trailer weight	2000kg#				2000kg#				2000kg#			
Gross train weight	6000kg#				6000kg#				6000kg#			
BED SIZES												
Front double	194cm x 133cm / 6'4" x 4'4" / 3'6"				194cm x 136cm / 6'4" x 4'6"				194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"			
Rear double	188cm x 129cm / 6'2" x 4'3"				203cm x 132cm / 6'8" x 4'4"							
Rear transverse single									206cm x 115cm / 6'9" x 3'9"			
Rear nearside single									195cm x 78cm / 6'5" x 2'7"			
Rear offside single									195cm x 78cm / 6'5" x 2'7"			
Drop down bed					189cm x 150cm / 6'2" x 4'11"							




794



874



884

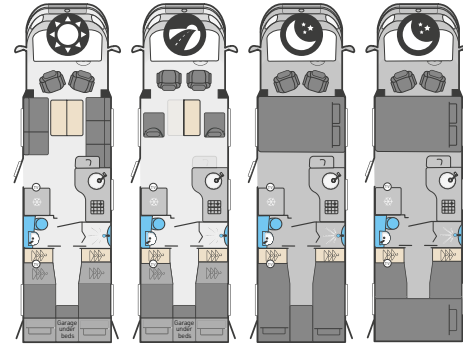


Standard		Optional		Optional		Optional		Standard		Optional		Optional		Optional	
160		160 Auto		180		180 Auto		160		160 Auto		180		180 Auto	
2.2ltr				2.2ltr				2.2ltr				2.2ltr			
160 HP @ 3500rpm				180 HP @ 3500rpm				160 HP @ 3500rpm				180 HP @ 3500rpm			
380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm
4.70m / 15'5"				4.70m / 15'5"				4.70m / 15'5"				4.70m / 15'5"			
4				5				4				4			
4				6				4				4			
7.84m / 25'9"				8.96m / 29'5" Est				8.96m / 29'5" Est				8.96m / 29'5" Est			
2.38m / 7'10"				2.38m / 7'10"				2.38m / 7'10"				2.38m / 7'10"			
2.89m / 9'6"				2.91m / 9'6" Est				2.91m / 9'6" Est				2.92m / 9'7" Est			
Thule 4200 4.5m				Thule 4200 4.5m				Thule 4200 4.5m				Thule 4200 4.5m			
4500kg				5000kg				5000kg				5000kg			
3477kg Est	3495kg Est	3477kg Est	3495kg Est	3942kg Est	3960kg Est	3942kg Est	3960kg Est	3765kg Est	3783kg Est	3765kg Est	3783kg Est	3765kg Est	3783kg Est	3765kg Est	3783kg Est
1023kg Est	1005kg Est	1023kg Est	1005kg Est	1058kg Est	1040kg Est	1058kg Est	1040kg Est	1235kg Est	1217kg Est	1235kg Est	1217kg Est	1235kg Est	1217kg Est	1235kg Est	1217kg Est
THREE				THREE				THREE				THREE			
2000kg#				2000kg#				2000kg#				2000kg#			
6000kg#				6000kg#				6000kg#				6000kg#			
194cm x 133cm / 106cm / 6'4" x 4'4" / 3'6"				194cm x 150cm / 136cm / 6'4" x 4'11" / 4'6"				194cm x 186cm / 150cm / 6'4" x 6'1" / 4'11"				194cm x 186cm / 150cm / 6'4" x 6'1" / 4'11"			
180cm x 143cm / 5'11" x 4'8"				203cm x 183cm / 6'8" x 6'0"				206cm x 115cm / 6'9" x 3'9"				206cm x 115cm / 6'9" x 3'9"			
								195cm x 78cm / 6'5" x 2'7"				195cm x 78cm / 6'5" x 2'7"			
								189cm x 150cm / 6'2" x 4'11"				189cm x 150cm / 6'2" x 4'11"			

CONTINUED...



894



	Standard	Optional	Optional	Optional
Fiat MultiJet diesel engine	160	160 Auto	180	180 Auto
Engine capacity	2.2ltr			
Engine power	160 HP @ 3500rpm		180 HP @ 3500rpm	
Engine torque	380 Nm @ 1500rpm	400 Nm @ 1500rpm	380 Nm @ 1500rpm	450 Nm @ 1500rpm
Wheel base	4.70m / 15'5"			
Seat belts (inc. driver)	4			
Berths (sleeping positions)	4			
Overall length	8.96m / 29'5" Est			
Overall body width (mirrors folded)	2.38m / 7'10"			
Overall height	2.92m / 9'7" Est			
Standard awning	Thule 4200 4.5m			
Maximum technical permissible laden mass (A)	5000kg			
Mass in running order (B)	3802kg Est	3820kg Est	3802kg Est	3820kg Est
Maximum user payload (A-B)	1198kg Est	1180kg Est	1198kg Est	1180kg Est
Thermal insulation grade	THREE			
Maximum trailer weight	2000kg#			
Gross train weight	6000kg#			
BED SIZES				
Front double	194cm x 186cm / 150cm / 6'4" x 6'1" / 4'11"			
Rear double	195cm x 143cm / 6'5" x 4'8"			
Rear transverse single				
Rear nearside single				
Rear offside single				
Drop down bed				

KON-TIKI OPTIONAL EXTRAS

FACTORY FIT

The following weights are for optional extras fitted at the time of manufacture of the motorhome (subject to availability).

WEIGHT

Detachable homologated tow bar* and electrics

40kg

DEALER FIT

WEIGHT

Thule Elite G2 two cycle rack** (except 774/874)

10.1kg

Swift Command Tracker by Sargent annual subscription

-

Notes:

- * Please note that the additional weight of the tow bar and trailer nose weight increases the rear axle loading of the motorhome so care should be taken that the rear axle load is not exceeded when towing. To ensure adequate road holding, the load on the front axle, under all conditions, must not be less than 40% or more than 70% of the total weight. Care must be taken when distributing loads. Please see the Technical Handbook for permissible axle loads, the loadings and weights stated are maximums and must not be exceeded under any circumstances
- ** Dependent on model, visibility through rear camera may be reduced when bicycles are carried on the optional bike carrier
- # The maximum trailer weight is limited by the gross train weight which must not be exceeded. For example if the vehicle is at the maximum MTPLM of 4500kg, then the maximum trailer weight possible is 1500kg. Reducing the weight of the vehicle by removing payload, will allow you to increase the trailer weight up to a maximum of 2000kg
- Est Estimate



SMART CONSTRUCTION



SMART is the basis of our intelligent construction system used across our entire coachbuilt motorhome range.

Strong, Modern, Aerodynamic, Resilient and Tested, you can be assured your Swift motorhome is a high quality, engineered product.



STRONG

The Strong timberless body frame uses 'PURe', a tough, hard polyurethane based product that is totally impervious to water and has been proven through use.



MODERN

The SMART construction system uses Modern materials and has been developed to ensure the exterior profiles maintain the Modern desirable looks our motorhomes are renowned for.



AERODYNAMIC

We continue to lead the way in Aerodynamics using Computational Fluid Dynamics to help shape the bodyshell for better fuel consumption.



RESILIENT

All fixings are made into the 'PURe' material to a pre-defined depth. 'PURe' is totally impervious to water and has no veins. This means there is no passage for water from the outer skin, making the motorhome highly Resilient to moisture.



TESTED

Extensive safety and durability Testing at the Millbrook track, and cold chamber Testing down to minus 15°C and beyond, puts prototypes through conditions most products will never have to experience in a lifetime; all part of the Swift ethos to deliver the best products.



HAIL RESISTANT GRP ROOF

Woven GRP outer surface provides greater durability from the elements.



GRP SIDEWALLS

Balanced panel side walls with GRP outer and inner skins. GRP is more impact resistant than aluminium and can be easily repaired, ensuring long lasting good looks and helping protect your investment for the future.



'SMART' GRP sidewall during the production process.



FLOOR CONSTRUCTION

'Sandwich' floor construction with ply upper, high rigidity Styrofoam core and GRP outer skin to provide greater durability from the elements.



SWIFT

CREATING SMILES FOR LIFE

GENERAL TECHNICAL NOTES

1. The Maximum User Payload includes:
 - a) the conventional load (this is the allowance for passengers)
 - b) essential habitation equipment (items and fluids required for safe and proper functioning of habitation equipment)
 - c) optional equipment (items available from the manufacturer over and above the standard specification)
 - d) personal effects (those items not covered by the above)
2. The Mass in Running Order is the mass of the unladen vehicle including a 75kg allowance for the driver plus engine coolants and 90% of the fuel tank capacity and 1 x 6kg Calor Lite LPG cylinder. The MRO is calculated with the fresh water tank empty. If you travel with water in the fresh water tank then the payload will reduce accordingly.
3. Please take care to ensure that you have allowed for the masses of all items you intend to carry in the motorhome, e.g. passengers, optional equipment, essential habitation equipment and personal effects, such as clothing, food, pets, bicycles, sailboards, sports equipment etc.
4. Warning - under no circumstances should the maximum technical permissible laden mass of this motorhome be exceeded.

DISCLAIMER

This brochure does not constitute an offer by Swift Group Limited (Swift). Swift reserves the right to alter specifications at any time as materials and conditions demand. Distributors and dealers sell Swift products on their own account and not as agents of Swift. Accordingly, they have no authority to bind Swift or to make any representation or undertaking whatsoever on behalf of Swift. Issued September 2021.

VISIT SWIFTGROUP.CO.UK TO...



Configure your model



Watch videos



Download brochure



Find a dealer

FOLLOW THE SWIFT FAMILY

